

8 Port 10/100M ACTIVE POE Switch-(8+2)

Model No.:EX-10120P

Product Describe

The PoE switch provides power and data from a single point, using Power over Ethernet (PoE) over a single Cat-5 cable. It can be used for any 10/100Mbps link and supply industry-standard IEEE 802.3af/at power. Advanced auto-sensing algorithm gives power to 802.3af end devices, In addition, the PoE switch automatically determines PoE requirements, speed, duplex, and cable type using Auto Uplink. Easy to operate and reliable.

The PoE switch is ideal for powering PoE devices such as IP cameras, WLAN access point, IP phones, office access control systems, and other PD devices and offers a line of high quality products that provide a total solution for Ethernet application in different environments.

8 Port 10/100M POE Switch(8+2)



- ◆ 8*10/100Mbps POE port,2*10/100Mbps UP-Link port
- ◆ 100m Transmission Distance,250m after use extend function
- ◆ Compatible with IEEE802.3AF/AT
- ◆ Whole Power:120W
- ◆ All port supported by MDI/MDIX auto flip and self negotiation
- ◆ Supply 8pcs 10/100Mbps adaptive high speed forwarding data packet non-lost port.
- ◆ Add high level lightning protection device, up to 6000V.
- ◆ Each port max. power supply reached 30W.
- ◆ Low heat design, safe and reliable, high stability

Application: ◆ Wireless Access Point ◆ IP Camera

Technical Specification

Product Name	8 Port 10/100M ACTIVE POE Switch(8+2)
Product Model	8+2GN
DATA PIN	1/2+,3/6-
Power Supply Type	Build in , 1/2+,3/6-
Max. PoE Power for single port	30W
Connector	8*10/100Mbps POE port,2*10/100Mbps UP-Link port
Network Medium	Cat5 (UTP) or more
Technology	
Network Standards	IEEE 802.3i 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3x Flow Control IEEE 802.3af Power over Ethernet
PoE power	30W per port(IEEE802.3af/at). Wiring: Data & power provided over pairs 1/2 and 3/6

Processing types	Store-and-forward Half-duplex back pressure and IEEE 802.3x full-duplex flow control
Address database Table Size	1K MAC address
Backboard Bandwidth	2G
Network Latency	Less than 20us for 64 byte frames in store-and-forward mode for 100Mbps to 100Mbps transmission
Power	
Input	AC 110-240 V, 50/60 Hz
PoE power consumption	30W per port(IEEE802.3af/at)
Overload current protection	Present
Mechanical	
Casing	Metal
Installation	Desktop
Interface	
LED Indicators	System: Power, PoE Maximum power Per port: Link, Activity, Speed, PoE active, PoE error
Environment specification	
Operating temperature	-10-55℃
Storage temperature	-40-70℃
Operating humidity	90% maximum relative humidity, non-condensing
Storage humidity	95% maximum relative humidity, non-condensing
Regulatory Approval	
ISO	Manufactured in ISO9001 facility
Safety	CE/CCC
Warranty	2 years
Dimensions	202*140*45mm(L*W*H)
Weight	0.97Kg


Package List

Package List	10 Port 10/100M POE Switch*1
	User Guide*1
	Warranty Card*1
	Power cable*1

Product Details



Application Diagram

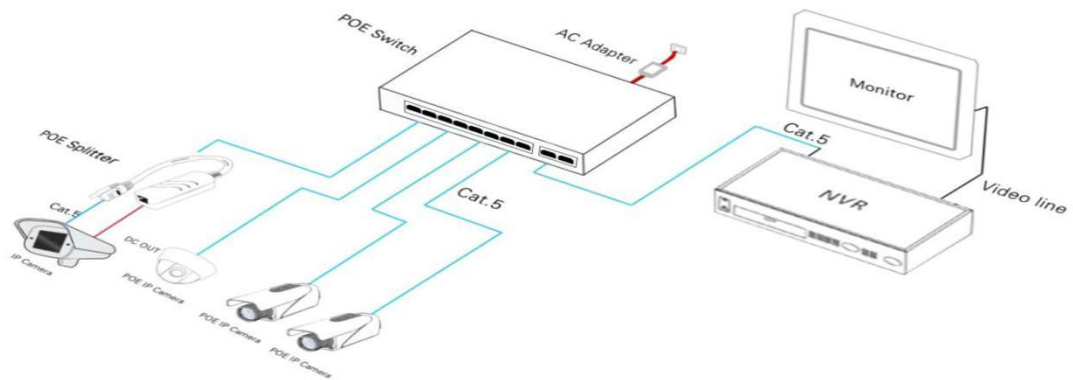

Extra Features:

- ◆ Manual reset changed to automatic reset, No power cuts are needed to change network speeds.
 - ◆ Low-voltage detection, step by step to rise, give buffer, prevent burning equipment.
-
- 